

DESCRIPTION


- ELECTRONIC BALLAST
- ELECTRONIC TRANSFORMER
- SWITCH MODE POWER SUPPLY

FEATURES:

- LOW THERMAL RESISTANCE
- HIGH INPUT RESISTANCE
- FAST SWITCHING
- ROHS COMPLIANT

MAXIMUM RATINGS (T_c=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Drain-source Voltage	VDS	60	V
gate-source Voltage	VGS	±20	V
Continuous Drain Current (T _C =25°C)	ID	150	A
Drain Current-Pulsed	IDM	600	A
Total Dissipation	PD	230	W
Junction Temperature	T _j	175	°C
Storage Temperature	T _{stg}	-55-175	°C
Single Pulse Avalanche Energy (L=0.5mH)	EAS	1350	mJ

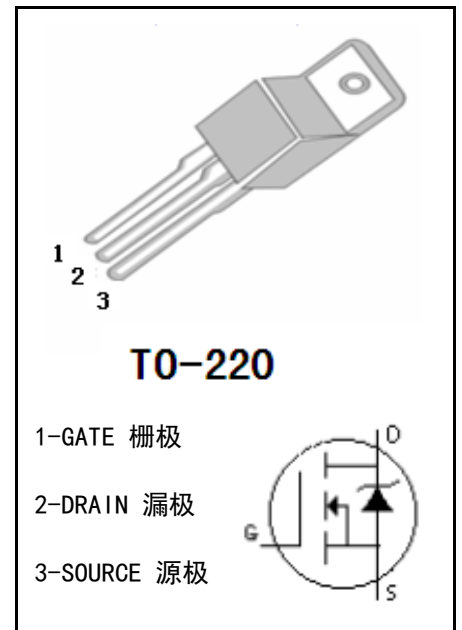MECHANICAL

ELECTRONIC CHARACTERISTICS (T_c=25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	MAX	UNIT
Drain-source Breakdown Voltage	BVDSS	VGS=0V, ID=250 μ A	60		V
Gate Threshold Voltage	VGS (TH)	VGS=VDS , ID=250 μ A	2	4	V
Drain-source Leakage Current	IDSS	VDS=60V, VGS=0V		1	uA
Drain-Source Diode Forward Voltage	VSD	VGS=0V, IS=30A		1.2	V
Gate-body Leakage Current (VDS = 0)	IGSS	VGS=±20V		±100	nA
Static Drain-source On Resistance	RDS (ON)	VGS=10V ID=30A		4.5	mΩ
Thermal Resistance Junction-case	RthJ-c			0.65	°C/W

■ DYNAMIC CHARACTERISTICS (T_c=25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Capacitance	C _{iss}	V _{gs} =0V Freq=1.0MHz, V _{ds} =25V	-	4600	-	pF
output Capacitance	C _{oss}		-	800	-	pF
Reverse Transfer Capacitance	C _{rss}		-	575	-	pF
Gate resistance	R _G	V _{gsDCBias} =0V, Speed=MED	-	1.2	-	Ω


■ SWITCHING CHARACTERISTICS (T_c=25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Turn-On Delay Time	t _{d(on)}	V _{DS} =30V, R _L =15 Ω V _{GS} =10V, R _G =2.5 Ω	-	26	-	ns
Turn-On Rise Time	t _r		-	24	-	ns
Turn-Off Delay Time	t _{d(off)}		-	90	-	ns
Turn-Off Rise Time	t _f		-	40	-	ns
Total Gate Charge	Q _g	V _{DS} =30V, I _D =30A, V _{GS} =10V	-	175	-	nC
Gate-Source Charge	Q _{gs}		-	39	-	nC
Gate-Drain Charge	Q _{gd}		-	70	-	nC


■ DRAIN-SOURCE DIODE MAXIMUM RATINGS AND CHARACTERISTICS (T_c=25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =30A	-	-	1.2	V
Reverse Recovery Time	t _{rr}	V _{GS} =0V, I _S =40A, dI _F /dt=100A/μs	-	36	-	ns
Reverse Recovery Charge	Q _{rr}		-	44	-	nC


CHARACTERISTICS CURVE

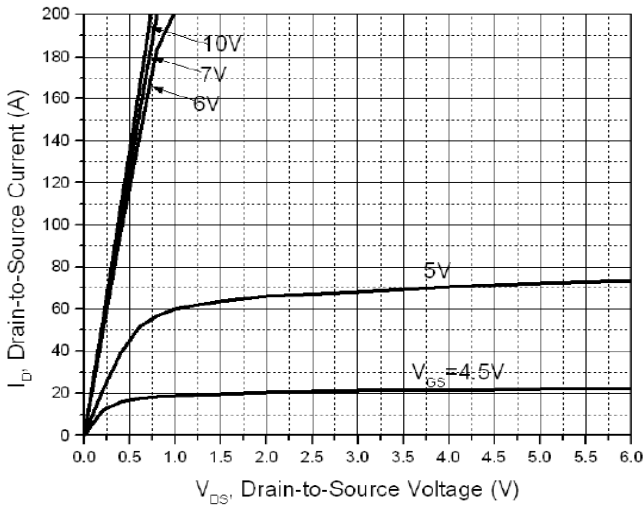


Output Characteristic

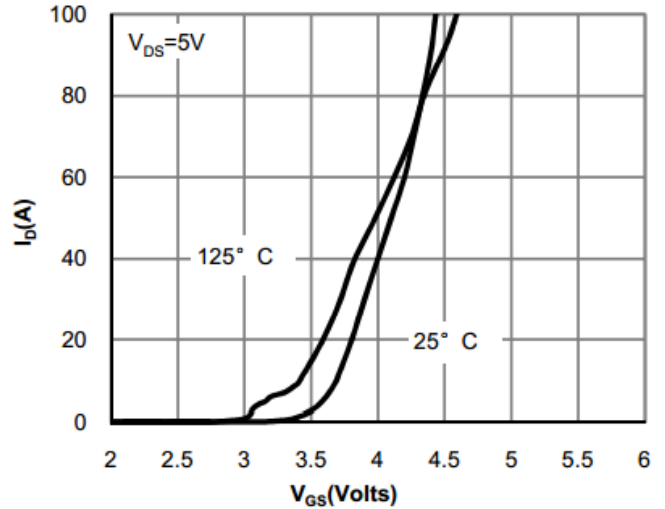


Transfer Characteristic

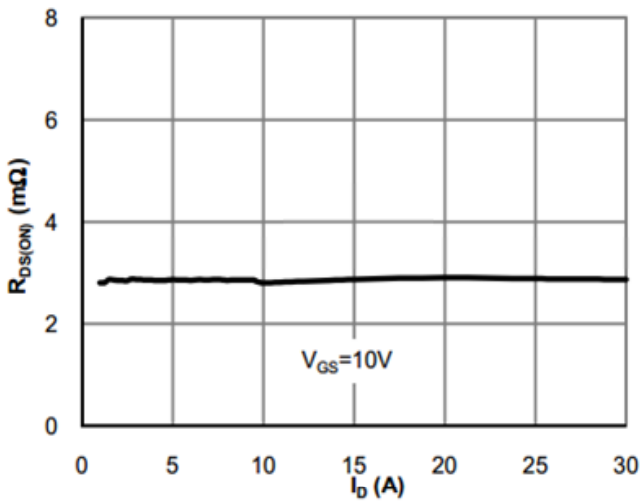


On Resistance Vs Drain Current

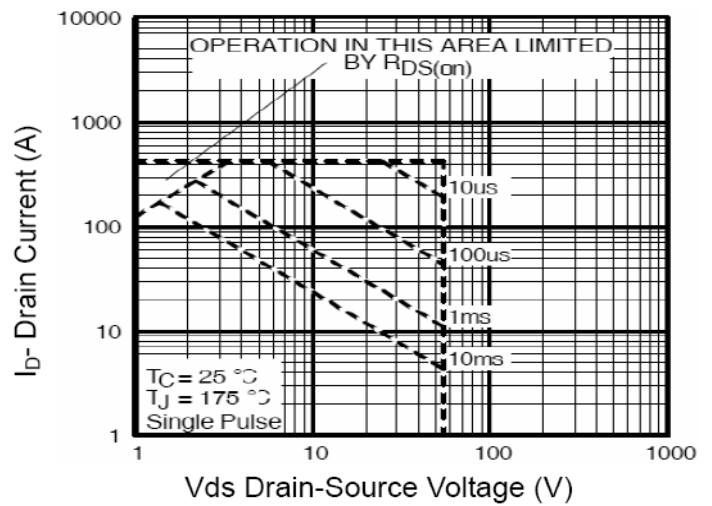

On Resistance Vs Gate Source Voltage

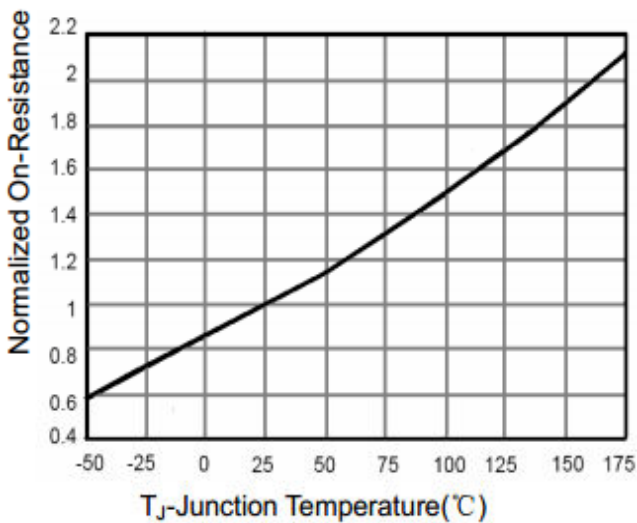


On Resistance Vs Junction Temperature

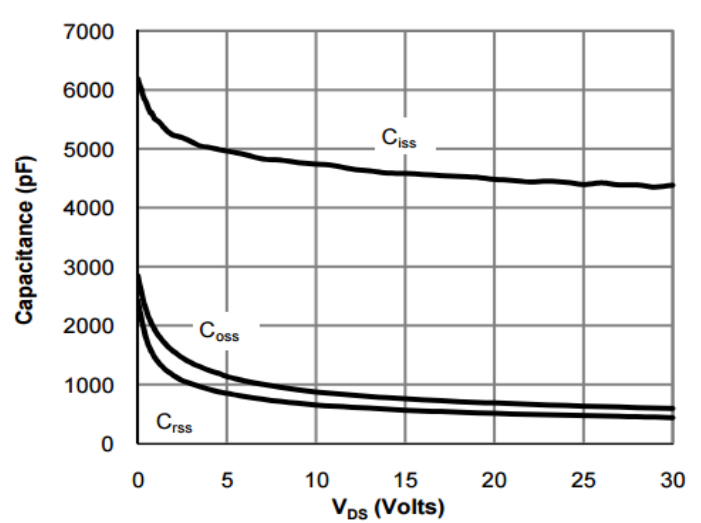


Capacitance


■ CHARACTERISTICS CURVE

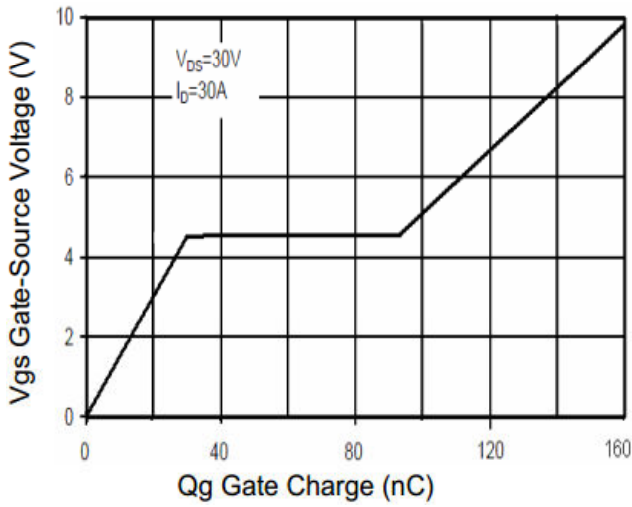

Gate Charge Waveform

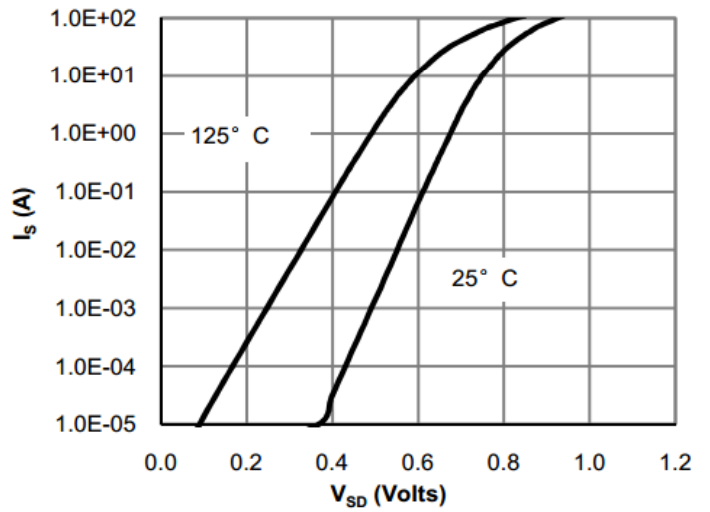

Source-Drain Diode Forward Voltage

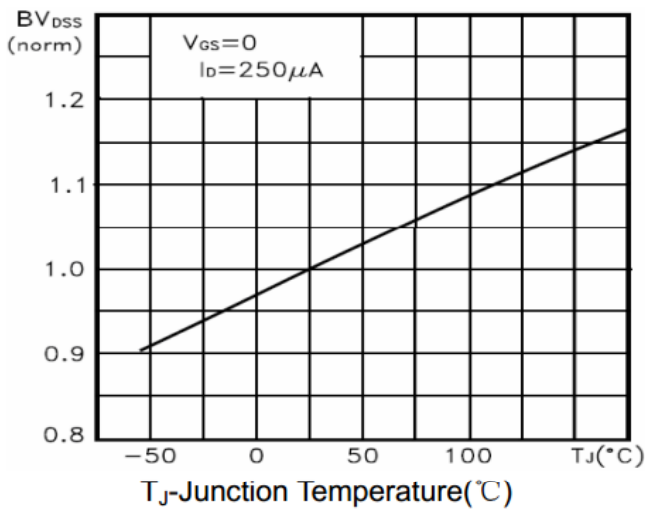

Breakdown Voltage Vs Junction Temperature



TO-220 MECHANICAL DATA

UNIT: mm

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	4		4.8	e	2.44	2.54	2.64
B	1.2		1.4	F	1.1		1.4
B1	1		1.4	L	12.5		14.5
b1	0.75		0.95	L1	3	3.5	4
c	0.4		0.55	ΦP	3.7	3.8	3.9
D	15		16.5	Q	2.5		3
D1	5.9		6.9	Q1	2		2.9
E	9.9		10.7				

